

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number
WO 2005/086304 A1

(51) International Patent Classification⁷: H02G 3/04

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/GB2005/000889

(22) International Filing Date: 8 March 2005 (08.03.2005)

(25) Filing Language: English

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(26) Publication Language: English

(30) Priority Data:
0405182.7 8 March 2004 (08.03.2004) GB

Published:


- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(71) Applicant and
(72) Inventor: RUDDICK, Paul David [GB/GB]; 39 Queens Road, Whitley Bay, Tyne and Wear NE26 3AW (GB).

(74) Agents: WATSON, Robert et al.; Mewburn Ellis LLP, York House, 23 Kingsway, London Greater London WC2B 6HP (GB).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONDUITS

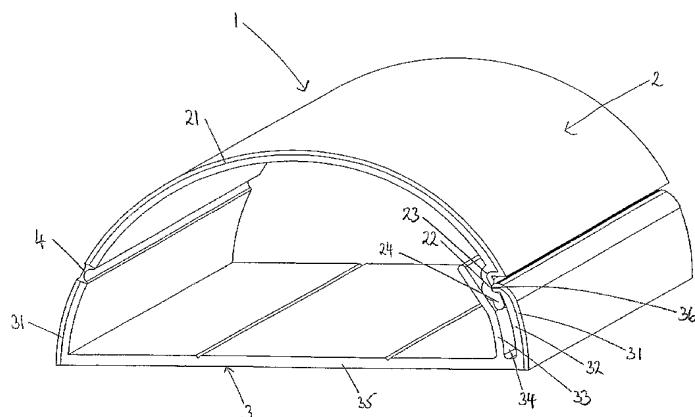

(57) **Abstract:** A conduit (1) having a substantially semi-circular outer cross-section comprising a base portion (3) and a lid portion (2), the lid portion (2) being attached to the base portion (3) by a hinge (4) and having a clip (23) on the opposite side, wherein the hinge (4) is located at an angular elevation from the base of between 10° and 35°, the base portion (3) having a clip socket for retaining the clip (23), wherein the clip socket comprises an outer wall (32), which forms part of the semi-circular outer cross-section, and an inner wall (33), between which is defined a channel (34) for the clip (23), the height of the inner wall above the bottom of the base portion (3) being substantially the same as the height of the hinge (4) above the bottom of the base portion (3).

WO 2005/086304 A1